

Ball transfer units with spring clips

Item description/product images



Description

Material:

Steel electro zinc-plated.

Note:

Ball transfer units with spring clips for easy installation and removal from the functional side. The roller is held in place with spring clips, this permits generous tolerances in the receiving hole.

They have a felt seal to protect against dirt.


S = Minimum nominal thickness of mounting base.

Drawing reference:


- 1) load ball
- 2) bearing balls

Form B: cap and housing electro zinc-plated, balls steel

Form C: cap and housing electro zinc-plated, balls stainless steel

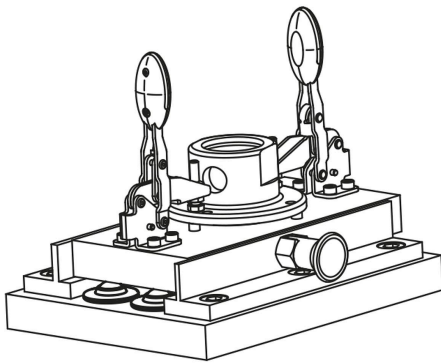

Drawings

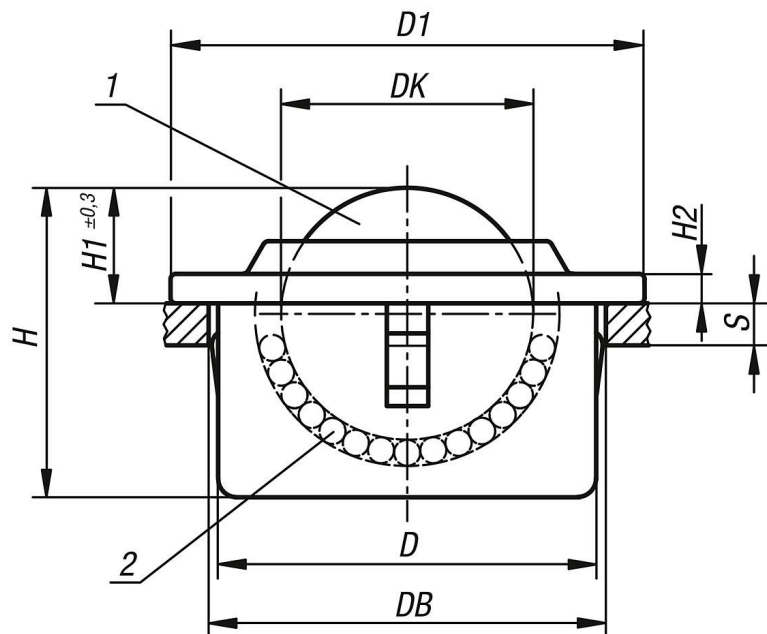

Overview of items

Ball transfer units with spring clips

Ball transfer units with spring clips

Overview of items

Order No.	Material	Material	DK	D	D1	Receiver-Ø DB	H	H1	H2	S	Load rating C (N)
B0509.115	steel	steel	15,8	24±0,1	31	25 +0,5	21	9,5	2,8	2	600
B0509.122	steel	steel	22,2	36±0,1	45	37 +0,5	30	9,8	2,8	3	1600
B0509.130	steel	steel	30	45±0,1	55	46 +0,5	37	13,8	4	6	3000
B0509.215	Stainless steel	Stainless steel	15,8	24±0,1	31	25 +0,5	21	9,5	2,8	2	600
B0509.222	Stainless steel	Stainless steel	22,2	36±0,1	45	37 +0,5	30	9,8	2,8	3	1600
B0509.230	Stainless steel	Stainless steel	30	45±0,1	55	46 +0,5	37	13,8	4	6	3000