

Cam-action indexing plungers

Item description/product images



Description

Product description:

Cam-action indexing plungers are used where any change in locking position due to lateral forces should be prevented. Turning the grip through 180° retracts the indexing pin, enabling a change in the indexed position. The notch ensures that the grip remains in this position and the indexing pin remains retracted.

Material:

Grip 1.0503.
 Sleeve 1.0403.
 Indexing pin free-cutting steel.
 Spring 1.4310.
 Grip cap thermoplastic PA

Version:

Sleeve and grip black oxidised.
 Indexing pin hardened, ground and black oxidised.
 Spring bright.
 Grip cap in various colours:
 -black grey RAL 7021.
 -pure orange RAL 2004.
 -colza yellow RAL 1021.
 -traffic red RAL 3020.
 -signal green RAL 6032.
 -traffic blue RAL 5017.
 -light grey RAL 7035.

Note:

If the cam-action indexing plunger is to be welded on, the sleeve should be tack welded so that the spring is not thermally damaged from the high temperatures.

Advantages:

Turning the grip through 180° retracts the pin.
 Optionally available with coloured plastic grip caps.
 Smooth sleeve, Connecting option via adapter sleeve

On request:

Special versions.

Accessory:


Positioning bush B0063.

Drawing reference:

Form E: without grip cap
 Form F: with grip cap

Cam-action indexing plungers

Drawings

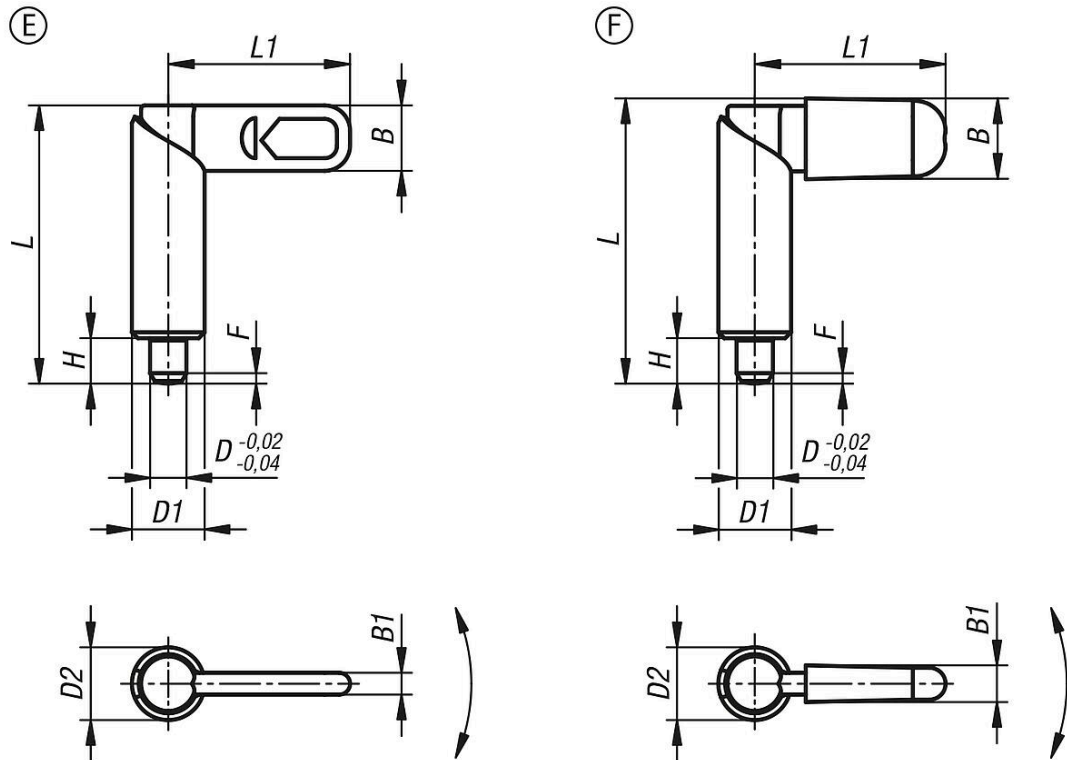

Overview of items

Cam-action indexing plungers

Order No.	Form	Component colour	D	D1	L	L1	B	B1	H	Fx30°	Spring force initial pressure F1 approx. N	Spring force final pressure F2 approx. N
B0530.080410	E	-	4	10	38,5	25	9	3	6	1	8	14
B0530.080510	E	-	5	10	38,5	25	9	3	6	1,3	8	14
B0530.080610	E	-	6	10	38,5	25	9	3	6	1,8	8	14
B0530.080512	E	-	5	12	47,4	30	10,8	3,6	8	1,3	8	14
B0530.080612	E	-	6	12	47,4	30	10,8	3,6	8	1,8	8	14
B0530.080812	E	-	8	12	47,4	30	10,8	3,6	8	2,3	8	14
B0530.080616	E	-	6	16	61,2	40	14,4	4,8	10	1,8	15	35
B0530.080816	E	-	8	16	61,2	40	14,4	4,8	10	2,3	15	35
B0530.081016	E	-	10	16	61,2	40	14,4	4,8	10	2,8	15	35
B0530.080820	E	-	8	20	71	50	18	6	12	2,3	20	60
B0530.081020	E	-	10	20	71	50	18	6	12	2,8	20	60
B0530.081220	E	-	12	20	71	50	18	6	12	3	20	60
B0530.090410	F	black grey RAL 7021	4	10	39,5	26,3	10,9	4,9	6	1	8	14
B0530.090510	F	black grey RAL 7021	5	10	39,5	26,3	10,9	4,9	6	1,3	8	14
B0530.090610	F	black grey RAL 7021	6	10	39,5	26,3	10,9	4,9	6	1,8	8	14
B0530.090512	F	black grey RAL 7021	5	12	48,4	31,1	12,9	5,7	8	1,3	8	14
B0530.090612	F	black grey RAL 7021	6	12	48,4	31,1	12,9	5,7	8	1,8	8	14
B0530.090812	F	black grey RAL 7021	8	12	48,4	31,1	12,9	5,7	8	2,3	8	14
B0530.090616	F	black grey RAL 7021	6	16	62,3	41,5	16,6	7	10	1,8	15	35
B0530.090816	F	black grey RAL 7021	8	16	62,3	41,5	16,6	7	10	2,3	15	35
B0530.091016	F	black grey RAL 7021	10	16	62,8	41,5	16,6	7	10	2,8	15	35
B0530.090820	F	black grey RAL 7021	8	20	72,3	51,3	20,5	8,5	12	2,3	20	60
B0530.091020	F	black grey RAL 7021	10	20	72,3	51,3	20,5	8,5	12	2,8	20	60
B0530.091220	F	black grey RAL 7021	12	20	72,3	51,3	20,5	8,5	12	3	20	60
B0530.0904102	F	orange RAL 2004	4	10	39,5	26,3	10,9	4,9	6	1	8	14
B0530.0905102	F	orange RAL 2004	5	10	39,5	26,3	10,9	4,9	6	1,3	8	14
B0530.0906102	F	orange RAL 2004	6	10	39,5	26,3	10,9	4,9	6	1,8	8	14

Cam-action indexing plungers

Overview of items

Order No.	Form	Component colour	D	D1	L	L1	B	B1	H	Fx30°	Spring force initial pressure F1 approx. N	Spring force final pressure F2 approx. N
B0530.0905122	F	orange RAL 2004	5	12	48,4	31,1	12,9	5,7	8	1,3	8	14
B0530.0906122	F	orange RAL 2004	6	12	48,4	31,1	12,9	5,7	8	1,8	8	14
B0530.0908122	F	orange RAL 2004	8	12	48,4	31,1	12,9	5,7	8	2,3	8	14
B0530.0906162	F	orange RAL 2004	6	16	62,3	41,5	16,6	7	10	1,8	15	35
B0530.0908162	F	orange RAL 2004	8	16	62,3	41,5	16,6	7	10	2,3	15	35
B0530.0910162	F	orange RAL 2004	10	16	62,8	41,5	16,6	7	10	2,8	15	35
B0530.0908202	F	orange RAL 2004	8	20	72,3	51,3	20,5	8,5	12	2,3	20	60
B0530.0910202	F	orange RAL 2004	10	20	72,3	51,3	20,5	8,5	12	2,8	20	60
B0530.0912202	F	orange RAL 2004	12	20	72,3	51,3	20,5	8,5	12	3	20	60
B0530.09041016	F	colza yellow RAL 1021	4	10	39,5	26,3	10,9	4,9	6	1	8	14
B0530.09051016	F	colza yellow RAL 1021	5	10	39,5	26,3	10,9	4,9	6	1,3	8	14
B0530.09061016	F	colza yellow RAL 1021	6	10	39,5	26,3	10,9	4,9	6	1,8	8	14
B0530.09051216	F	colza yellow RAL 1021	5	12	48,4	31,1	12,9	5,7	8	1,3	8	14
B0530.09061216	F	colza yellow RAL 1021	6	12	48,4	31,1	12,9	5,7	8	1,8	8	14
B0530.09081216	F	colza yellow RAL 1021	8	12	48,4	31,1	12,9	5,7	8	2,3	8	14
B0530.09061616	F	colza yellow RAL 1021	6	16	62,3	41,5	16,6	7	10	1,8	15	35
B0530.09081616	F	colza yellow RAL 1021	8	16	62,3	41,5	16,6	7	10	2,3	15	35
B0530.09101616	F	colza yellow RAL 1021	10	16	62,8	41,5	16,6	7	10	2,8	15	35
B0530.09082016	F	colza yellow RAL 1021	8	20	72,3	51,3	20,5	8,5	12	2,3	20	60
B0530.09102016	F	colza yellow RAL 1021	10	20	72,3	51,3	20,5	8,5	12	2,8	20	60
B0530.09122016	F	colza yellow RAL 1021	12	20	72,3	51,3	20,5	8,5	12	3	20	60
B0530.09041084	F	traffic red RAL 3020	4	10	39,5	26,3	10,9	4,9	6	1	8	14
B0530.09051084	F	traffic red RAL 3020	5	10	39,5	26,3	10,9	4,9	6	1,3	8	14
B0530.09061084	F	traffic red RAL 3020	6	10	39,5	26,3	10,9	4,9	6	1,8	8	14
B0530.09051284	F	traffic red RAL 3020	5	12	48,4	31,1	12,9	5,7	8	1,3	8	14
B0530.09061284	F	traffic red RAL 3020	6	12	48,4	31,1	12,9	5,7	8	1,8	8	14
B0530.09081284	F	traffic red RAL 3020	8	12	48,4	31,1	12,9	5,7	8	2,3	8	14
B0530.09061684	F	traffic red RAL 3020	6	16	62,3	41,5	16,6	7	10	1,8	15	35
B0530.09081684	F	traffic red RAL 3020	8	16	62,3	41,5	16,6	7	10	2,3	15	35
B0530.09101684	F	traffic red RAL 3020	10	16	62,8	41,5	16,6	7	10	2,8	15	35
B0530.09082084	F	traffic red RAL 3020	8	20	72,3	51,3	20,5	8,5	12	2,3	20	60
B0530.09102084	F	traffic red RAL 3020	10	20	72,3	51,3	20,5	8,5	12	2,8	20	60
B0530.09122084	F	traffic red RAL 3020	12	20	72,3	51,3	20,5	8,5	12	3	20	60
B0530.09041086	F	signal green RAL 6032	4	10	39,5	26,3	10,9	4,9	6	1	8	14
B0530.09051086	F	signal green RAL 6032	5	10	39,5	26,3	10,9	4,9	6	1,3	8	14
B0530.09061086	F	signal green RAL 6032	6	10	39,5	26,3	10,9	4,9	6	1,8	8	14
B0530.09051286	F	signal green RAL 6032	5	12	48,4	31,1	12,9	5,7	8	1,3	8	14
B0530.09061286	F	signal green RAL 6032	6	12	48,4	31,1	12,9	5,7	8	1,8	8	14
B0530.09081286	F	signal green RAL 6032	8	12	48,4	31,1	12,9	5,7	8	2,3	8	14
B0530.09061686	F	signal green RAL 6032	6	16	62,3	41,5	16,6	7	10	1,8	15	35
B0530.09081686	F	signal green RAL 6032	8	16	62,3	41,5	16,6	7	10	2,3	15	35
B0530.09101686	F	signal green RAL 6032	10	16	62,8	41,5	16,6	7	10	2,8	15	35
B0530.09082086	F	signal green RAL 6032	8	20	72,3	51,3	20,5	8,5	12	2,3	20	60
B0530.09102086	F	signal green RAL 6032	10	20	72,3	51,3	20,5	8,5	12	2,8	20	60
B0530.09122086	F	signal green RAL 6032	12	20	72,3	51,3	20,5	8,5	12	3	20	60
B0530.09041087	F	blue RAL5017	4	10	39,5	26,3	10,9	4,9	6	1	8	14
B0530.09051087	F	blue RAL5017	5	10	39,5	26,3	10,9	4,9	6	1,3	8	14
B0530.09061087	F	blue RAL5017	6	10	39,5	26,3	10,9	4,9	6	1,8	8	14
B0530.09051287	F	blue RAL5017	5	12	48,4	31,1	12,9	5,7	8	1,3	8	14
B0530.09061287	F	blue RAL5017	6	12	48,4	31,1	12,9	5,7	8	1,8	8	14
B0530.09081287	F	blue RAL5017	8	12	48,4	31,1	12,9	5,7	8	2,3	8	14
B0530.09061687	F	blue RAL5017	6	16	62,3	41,5	16,6	7	10	1,8	15	35
B0530.09081687	F	blue RAL5017	8	16	62,3	41,5	16,6	7	10	2,3	15	35
B0530.09101687	F	blue RAL5017	10	16	62,8	41,5	16,6	7	10	2,8	15	35
B0530.09082087	F	blue RAL5017	8	20	72,3	51,3	20,5	8,5	12	2,3	20	60
B0530.09102087	F	blue RAL5017	10	20	72,3	51,3	20,5	8,5	12	2,8	20	60
B0530.09122087	F	blue RAL5017	12	20	72,3	51,3	20,5	8,5	12	3	20	60
B0530.09041088	F	light grey RAL 7035	4	10	39,5	26,3	10,9	4,9	6	1	8	14
B0530.09051088	F	light grey RAL 7035	5	10	39,5	26,3	10,9	4,9	6	1,3	8	14
B0530.09061088	F	light grey RAL 7035	6	10	39,5	26,3	10,9	4,9	6	1,8	8	14
B0530.09051288	F	light grey RAL 7035	5	12	48,4	31,1	12,9	5,7	8	1,3	8	14

Cam-action indexing plungers

Overview of items

Order No.	Form	Component colour	D	D1	L	L1	B	B1	H	Fx30°	Spring force initial pressure F1 approx. N	Spring force final pressure F2 approx. N
B0530.09061288	F	light grey RAL 7035	6	12	48,4	31,1	12,9	5,7	8	1,8	8	14
B0530.09081288	F	light grey RAL 7035	8	12	48,4	31,1	12,9	5,7	8	2,3	8	14
B0530.09061688	F	light grey RAL 7035	6	16	62,3	41,5	16,6	7	10	1,8	15	35
B0530.09081688	F	light grey RAL 7035	8	16	62,3	41,5	16,6	7	10	2,3	15	35
B0530.09101688	F	light grey RAL 7035	10	16	62,8	41,5	16,6	7	10	2,8	15	35
B0530.09082088	F	light grey RAL 7035	8	20	72,3	51,3	20,5	8,5	12	2,3	20	60
B0530.09102088	F	light grey RAL 7035	10	20	72,3	51,3	20,5	8,5	12	2,8	20	60
B0530.09122088	F	light grey RAL 7035	12	20	72,3	51,3	20,5	8,5	12	3	20	60