

Spring plungers to press-in, without collar, steel

Item description/product images



Description

Material:

Sleeve steel.

Spring stainless steel 1.4310.

Ball steel or POM.

Version:

Sleeve black oxidised.

Ball hardened, bright.


Note:

With DIN 82-RAA knurl

Drawing reference:

1) knurl

Drawings

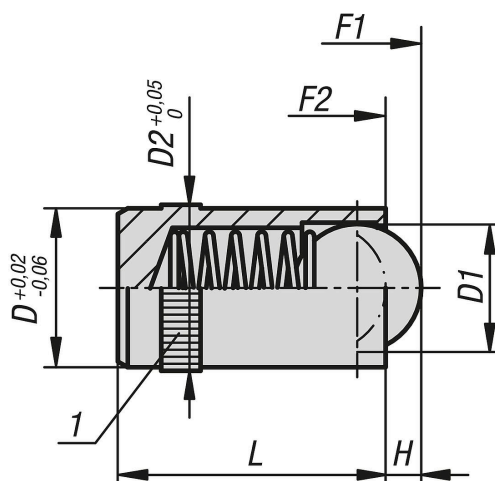

Overview of items

Spring plungers to press-in, without collar, steel

Order No.	Component material	D	D1	D2	H=Stroke	L	Spring force initial pressure F1 approx. N	Spring force final pressure F2 approx. N
B0611.103	steel	3	2	3,05	0,65	7	5	7
B0611.104	steel	4	3	4,05	0,8	9	12	22
B0611.105	steel	5	4	5,05	1	12	19	30
B0611.106	steel	6	5	6,05	1,5	14	22	40
B0611.108	steel	8	6	8,05	1,8	16	42	73
B0611.110	steel	10	8	10,05	2,7	22	54	100
B0611.112	steel	12	10	12,05	3,2	24	54	122
B0611.304	POM	4	3	4,05	0,6	9	12	22
B0611.305	POM	5	4	5,05	0,9	12	19	30
B0611.306	POM	6	5	6,05	1,3	14	22	40
B0611.308	POM	8	6	8,05	1,7	16	42	73
B0611.310	POM	10	8	10,05	2,6	22	54	100
B0611.312	POM	12	10	12,05	3,1	24	54	122

Spring plungers to press-in, without collar, steel

Overview of items
